



## Softmount Washer Extractor



**Capacity: 10/15/20/25kg**

### Features

- Stainless steel drum and tub.
- Clad steel panels resist rust and fingerprints.
- 3D stereoscopic honeycomb-shaped inner drum with perforated lifters.
- Permanently lubricated bearings .
- Advanced suspension system, in conjunction with an intelligent electronic balancing system.
- 10kg washer utilizes direct drive motor, eliminating the need for belts.
- All casting parts are well processed and painted.
- Standard configuration includes 4 chemical compartments and 5 hoses for dosing pumps.
- Mechanical and electronic double door locks.
- Advanced inverter drive system.
- Easy access to service parts from front and back panels .

### Control

- Full-color touchscreen control offers 50 programs for OPL and 6 for vend.
- Freely programmable and available in multiple languages.
- USB connection and networking capability.
- Remaining time indicator.
- Payment options available in coin, card, mobile pay, and central payment.


### Options

- Electric heating, Steam heating or dual heating.
- Contact us for other requests.

Specifications		SXTP100F	SXTP150F	SXTP200F	SXTP250F
Control		Touch	Touch	Touch	Touch
Activation		OPL/Vend	OPL/Vend	OPL/Vend	OPL/Vend
Capacity	kg	10	15	20	25
Cylinder Diameter	mm	532	600	683	774
Cylinder Depth	mm	405	478	504	489
Volume	liter	90	135	185	230
Door Center to Floor	mm	645	645	670	797
Cold Water Inlet	inch	1/2	1/2	1/2	3/4
Hot Water Inlet	inch	1/2	1/2	1/2	3/4
Steam Heating		Inlet:1/2 inch, Pressure:3-8 bar			
Compressed Air Inlet*	inch	8	8	8	8
Drain Diameter	mm	51	51	51	76
Motor Power	kW	1 (DD)	0.75	1.8	3.5
Single phase heating power	kW	2	6	6	6
Three-phase heating power	kW	6	9	18	18
Extraction Speed	RPM	1000	946	886	833
G-Force		300	300	300	300
Power Supply		220V/50Hz/60Hz/ 1ph	220V/50Hz/60Hz /1ph	220V/50Hz/60Hz /1ph	220V/50Hz/60Hz/ 1ph
		Electric heating 380V/50Hz/60Hz/ 3ph	Electric heating 380V/50Hz/60Hz /3ph	Electric heating 380V/50Hz/60Hz /3ph	Electric heating 380V/50Hz/60Hz/ 3ph
		Contact us for other voltages			
Overall Width	mm	710	800	900	1012
Overall Depth	mm	807	916	1030	1070
Overall Height	mm	1274	1274	1307	1485
Net Weight	kg	240	290	400	610
Packing Width	mm	810	900	1000	1112
Packing Depth	mm	907	1016	1130	1170
Packing Height	mm	1424	1424	1457	1635

\* Compressed air inlet only applies to steam heating models.

Oasis preserves the right to change the machines and the specification at any time without prior notice.

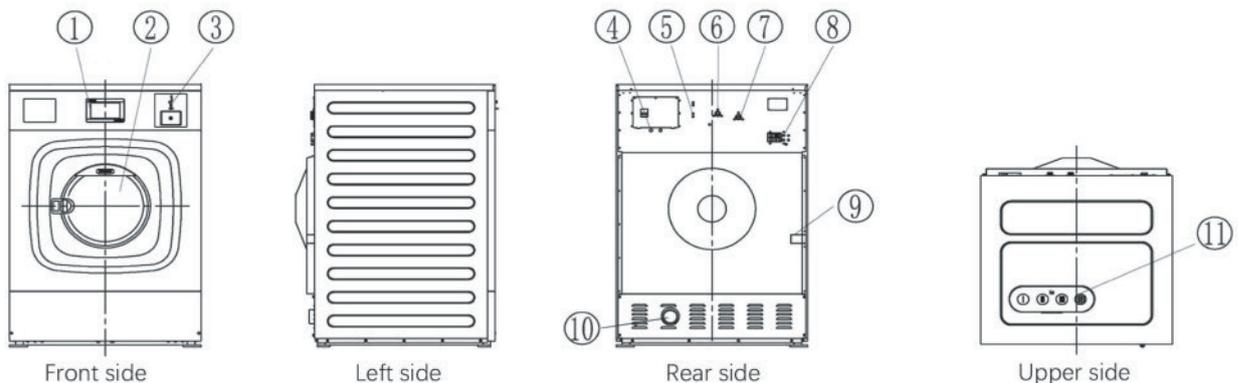

- |                  |                         |
|------------------|-------------------------|
| 1.Controller     | 7.Cold water            |
| 2.Door           | 8.External liquidsupply |
| 3.Coin           | 9.Steam                 |
| 4.Cable          | 10.Drainage             |
| 5.Compressed air | 11.Soap                 |
| 6.Hot water      |                         |