

OASIS SINGLE TUMBLE DRYER

DCHG-500RT
55 lbs (25kg)

DCHG-700RT
77 lbs (35kg)

Powerful and Efficient

- Stainless Steel Drum (ANSI430)
- Single Phase Power Supply
- Inverter Driven Motor with Reversing Drum
- Flexible Pricing Configuration
- 7" Touch Screen LCD Controller
- Multiple Payment Options**



Features a gas burner uniquely designed to offer energy-saving 3D airflow, ensuring thorough drying performance with low energy consumption. This translates to achieving higher productivity with low operating costs.

Equipped with forward and reverse spin technology, promises even drying for various types of laundry. Requires only a single-phase power supply, simplifying installation and operation.


Technical Specifications

MODEL	DCHG-500RT	DCHG-700RT
Capacity (kg)	25	35
Tumble Diameter (mm)	903	903
Tumble Depth (mm)	770	1024
Tumble Volume (L)	493	656
Tumble Speed (RPM)	40 - 50	40 - 50
Reverse Drum	Yes	Yes
Exhaust Blower (kW)	0.75	0.75
Drive Motor (kW)	0.55	0.55
Door Opening (mm)	660	660
Exhaust Connection (mm)	200	200
Airflow (cmm)	960	960
Inlet Gas Connection (Inch)	1/2"	1/2"
Burner Capacity (kW)	30	36
Power Supply	220-240VAC @ 50/60Hz	
Width (mm)	978	978
Height (mm)	1914	1914
Depth (mm)	1073	1327
Weight (kg)	230	290
Crated Width (mm)	1150	1150
Crated Height (mm)	2150	2150
Crated Depth (mm)	1250	1500
Crated Weight (kg)	260	320


* Due to continuous product improvements, design and specifications are subject to change over times without prior notice

Dimension Specifications


DCHG-500RT

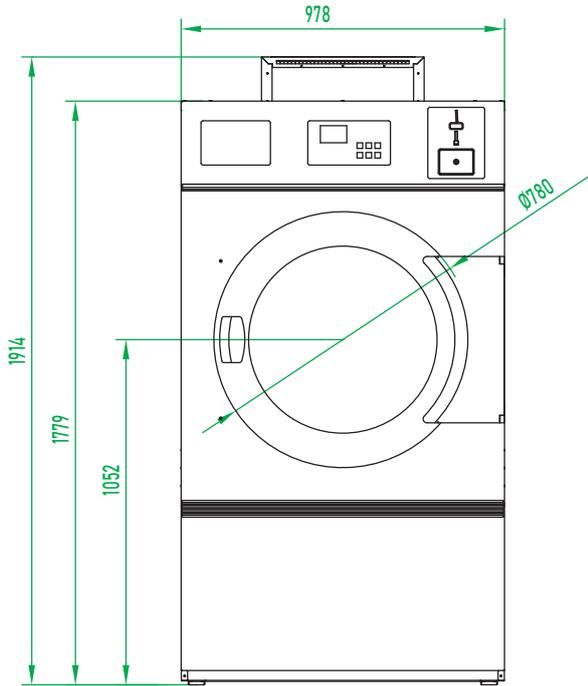


FRONT VIEW

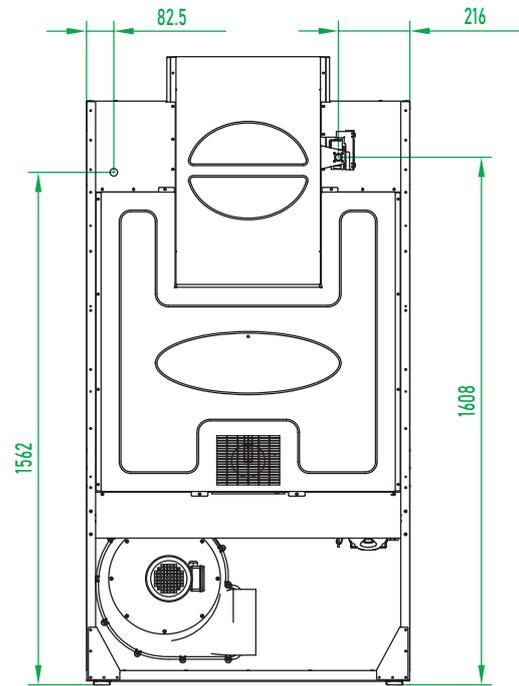

REAR VIEW

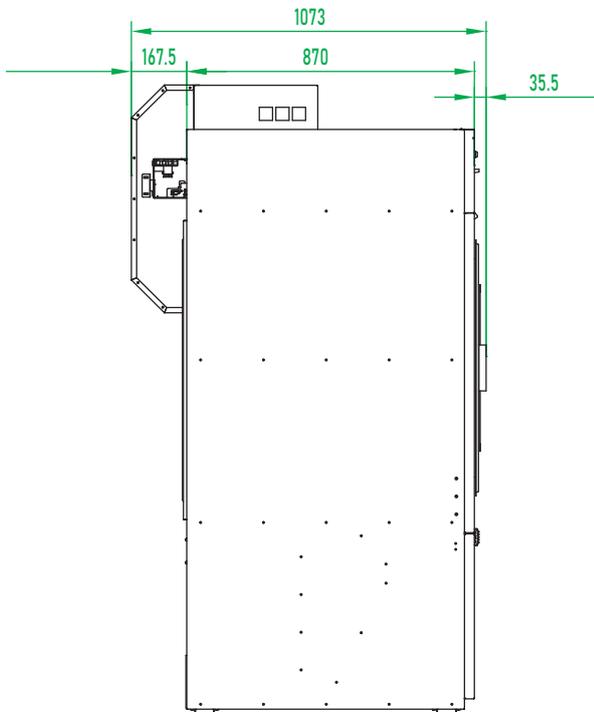


SIDE VIEW

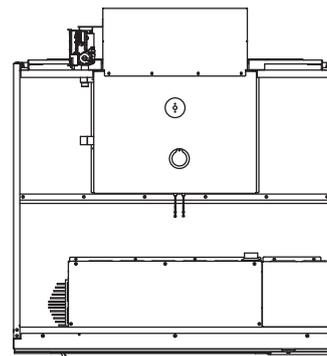


TOP VIEW

Dimension Specifications


DCHG-700RT

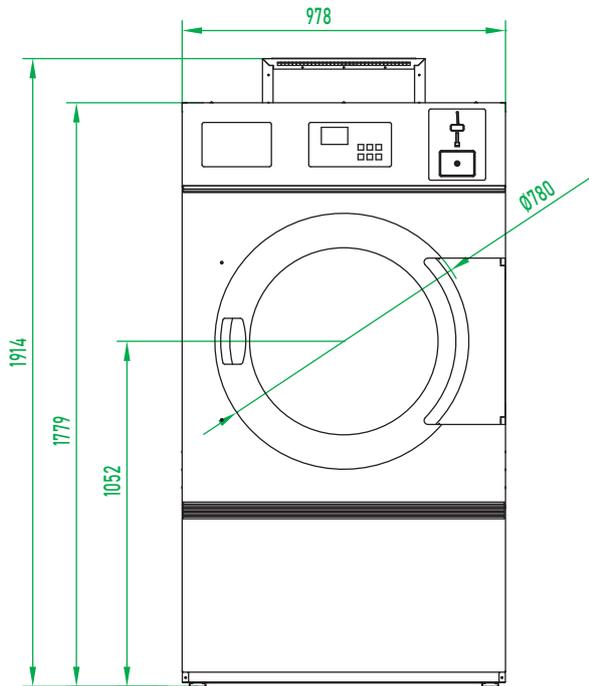


FRONT VIEW

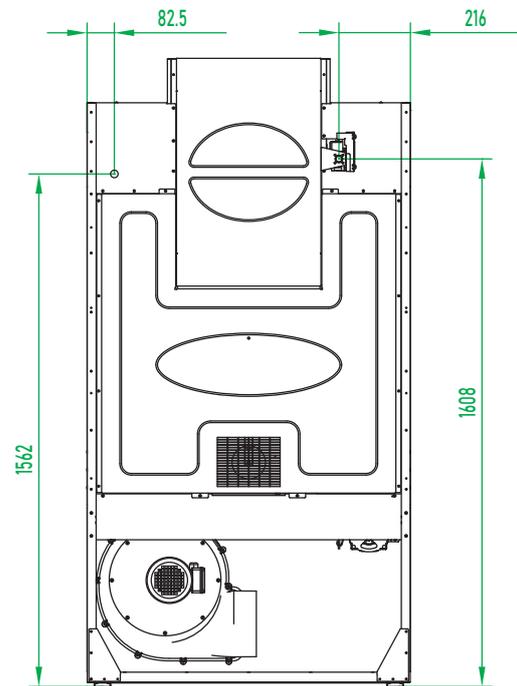

REAR VIEW

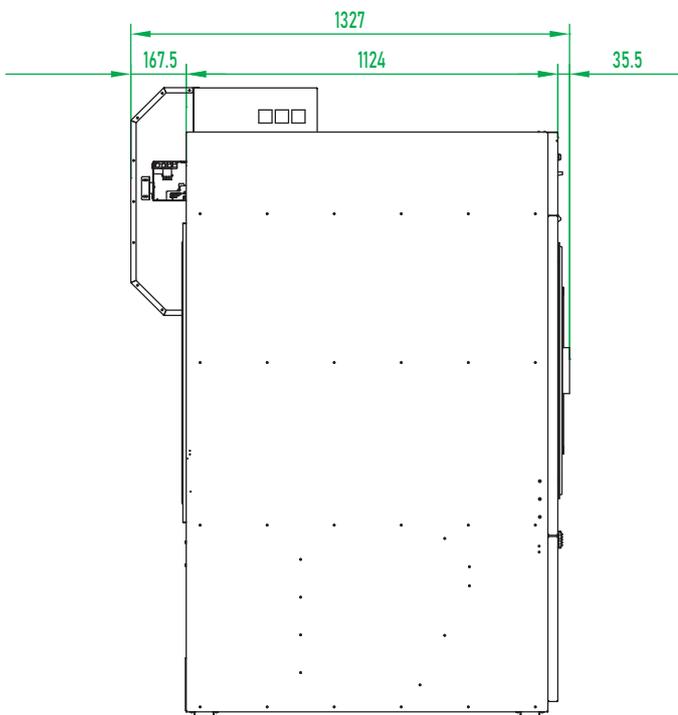

SIDE VIEW

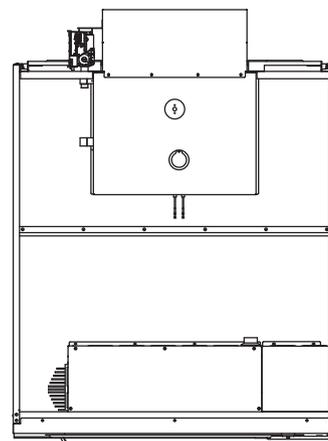

TOP VIEW